




DIN 980 V

~ISO 7042

8

Standard withdrawn

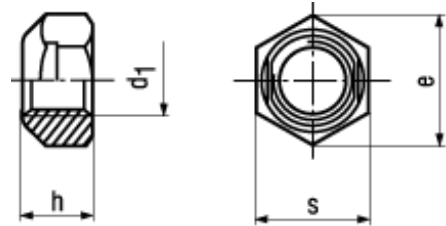

## BN 169

## Prevailing torque type hex lock nuts

all-metal

Steel 8

zinc plated blue

| Article# | d <sub>1</sub> | h max. | s   | e min. |
|----------|----------------|--------|-----|--------|
| 3642072  | M3             | 3,7    | 5,5 | 6,01   |
| 1095609  | M4             | 4,2    | 7   | 7,66   |
| 1095617  | M5             | 5,1    | 8   | 8,79   |
| 1095625  | M6             | 6      | 10  | 11,05  |
| 1095633  | M8             | 8      | 13  | 14,38  |
| 1095641  | M10            | 10     | 17  | 18,9   |
| 1095668  | M12            | 12     | 19  | 21,1   |
| 1095676  | M14            | 14     | 22  | 24,49  |
| 1095684  | M16            | 16     | 24  | 26,75  |
| 3624498  | M18            | 18     | 27  | 29,56  |
| 5504711  | M20            | 20     | 30  | 32,95  |
| 3624499  | M22            | 22     | 32  | 35,03  |
| 3624500  | M24            | 24     | 36  | 39,55  |