


	DIN 7979 D	~ISO 8735 A	60 HRC
---	------------	-------------	--------

Standard withdrawn

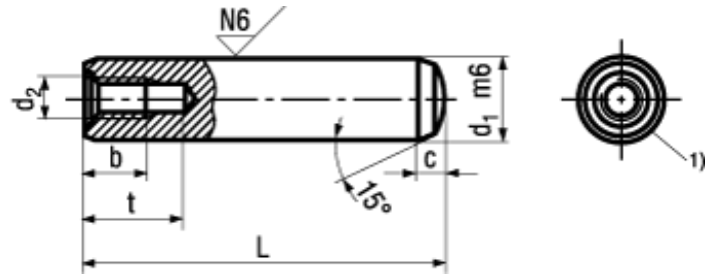

1) Slight flat or small groove at manufacturer's option

BN 1970

Parallel pins with internal thread

hardened, ground

Steel hardened 60 HRC

plain

- ~UNI 6364 B
- ~CSN 022151
- Tolerance: m6

Article#	d ₁	c~	d ₂	b	t min.	L
1431056	6	2,1	M4	6	10	16
1431064						20
1431072						24
1431080						28
1431099						32
1431102						40
1431110						50
1431129						60
1431137	8	2,6	M5	8	12	20
1431145						24
1431153						28
1431161						32
5507476						36
1431188						40
1431196						50
1431218						60
1431226						70
1431234	10	3	M6	10	16	24
1431242						28
1431250						32
1431269						40
5509357						45

Article#	d ₁	c~	d ₂	b	t min.	L
1431277	10	3	M6	10	16	50
1431285						60
1431293						70
1431307						80
1431315	12	3,8	M6	10	16	28
1431323						32
1431331						40
1431358						50
1431366						60
1431374						70
1431382						80
5517718						90
1431390						100
5506991						120
5518141	14	4	M8	12	20	50
1431404	16	4,7	M8	12	20	40
5506997						45
5507474						50
1431412						60
5513131						70
1431420						80
1431439						100
1431447						120
5507477	20	6	M10	16	25	50
1431455						60
5507002						70
1431463						80
1431471						100
1431552						120