




DIN 933

ISO 4017

8.8

Standard withdrawn

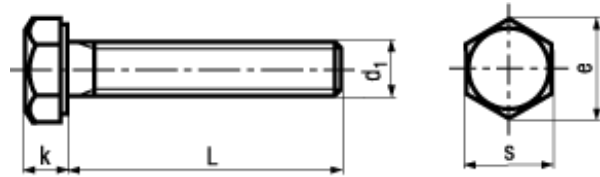

BN 60

Hex head screws

fully threaded

Steel 8.8

hot dip galvanized

- ~UNI 5739
- ~CSN 021103

M10; M12: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
5402710	M8	14,38	5,3	13	12
1053736					16
1053744					20
1053752					25
1053760					30
1053779					35
1053787					40
1053795					45
1053809					50
3169557					70
5402683	M10	18,9	6,4	17	16
1053841					20
1053868					25
1053876					30
1053884					35
1053892					40
1053906					45
1053914					50
5519993					55
1053922					60
3169559					70
1313789	M12	21,1	7,5	19	20

M10; M12: wrench size according to ISO on request

Article#	d ₁	e	k	s	L
1054015	M12	21,1	7,5	19	25
1054023					30
1054031					35
1054058					40
1054066					45
1054074					50
1054082					60
1313800					70
5512911					80
3169561					100
5402684	M16	26,75	10	24	25
1054155					30
1054163					35
1054171					40
1054198					45
1054201					50
3169565					55
1054228					60
5507806					65
1313827					70
1313835					80
1054295	M20	33,53	12,5	30	40
5402711					45
1054309					50
1054317					60
3169567					70
3217087					100
3266226					110
1054376	M24	39,98	15	36	50
5402712					55
1054384					60
5402714					70
3214162					90
5402715	M30	50,85	18,7	46	60