


~DIN 7500 M

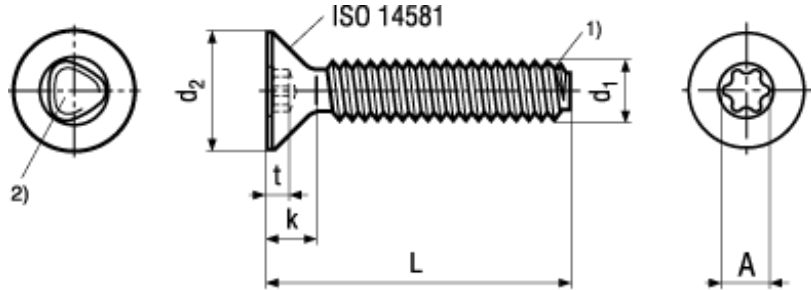

1) Tapered thread end max. 4P
2) Trilobular

BN 13278


Hexalobular (6 Lobe) socket flat countersunk head


~type M, thread forming screws

Stainless steel A2

- Waxed

i Countersink must be designed according to the corresponding standard!
A technical brochure is available on request.

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3061357	M2,5	4,7	1,5	X8	0,79	2,4	5
3061358							6
3061359							8
3061361							10
3061362							12
3061364	M3	5,5	1,65	X10	0,83	2,8	6
3061365							8
3061368							10
3061369							12
3061370							16
3271582							20
3271583							25
3061372	M4	8,4	2,7	X20	1,53	3,95	8
3061375							10
3061376							12
3061377							16
3061378							20
3271584							25
3271585							30
3061379	M5	9,3	2,7	X25	1,51	4,5	10
3061380							12
3061381							16
3061383							20
3271586							25
3271588							30

Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3061385	M6	11,3	3,3	X30	1,78	5,6	10
3061388							12
3061389							16
3061390							20
3061391							25
3271589							30