

BN 20346

Self-cutting threaded inserts


Steel case-hardened

zinc plated blue



ISO 4042

Fasteners hardness ≥ 320 HV with electroplated coatings:
Susceptible to hydrogen embrittlement!
Further notice to residual risks can be found in the introduction section.

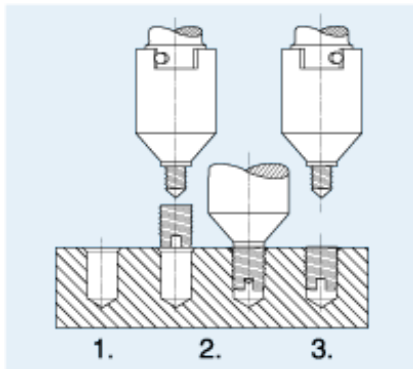

1. Drill the hole
2. Drive the insert into the workpiece (insert is cutting its own thread)
3. Disengage assembly tool

Article#	d ₁	P	d ₂	L
3381339	M2,5	0,5	4,5	6
3381341	M2,6	0,5	4,5	6
3381342	M3	0,5	5	6
3381343	M3,5	0,75	6	8
3381344	M4	0,75	6,5	8
3381345	M5	1	8	10
3381346	M6a	1	9	12
3381347	M6	1,5	10	14
3381348	M8	1,5	12	15
3381351	M10	1,5	14	18
3381353	M12	1,5	16	22
3381355	M14	1,5	18	24
3381357	M16	1,5	20	22
3381358	M20	1,5	26	27
3381360	M24	1,5	30	30